

## WB-FR BASIC UNINSULATED FIRE RATED ACCESS DOOR

The WB-FR Basic Uninsulated Fire Rated Access Door is designed for wall application only. It is not insulated and should only be installed in environments where temperature rise is not a concern. It features a 1 1/2" trim for an easy flush application into various wall finishes. UL Listed "B" label for 1-1/2 hours. File # R10364C UL US.

### FEATURES

<b>Door and Trim</b>	14 ga. cold rolled steel
<b>Box Return Frame</b>	16 ga. cold rolled steel, 2 1/2" deep frame
<b>Hinge</b>	180° full length piano hinge
<b>Latch</b>	Self latching lock with key and knurled knob
<b>Automatic Door Closer</b>	Standard on all doors
<b>Inside Release Latch</b>	Standard on all doors
<b>Finish</b>	White powder coat paintable finish
<b>Options</b> (at extra cost)	<ul style="list-style-type: none"> <li>Mortise lock preparation</li> <li>Stainless steel #304 and #316 (#4 satin finish)</li> <li>Masonry anchor straps</li> <li>Custom sizes available</li> </ul>

Note: WB-FR BASIC access doors are for vertical applications only as code allows and no temperature rise is required.


Model No.	A x B Door Size	Slam Latch	Shipping Weight (lbs) Steel/Stainless
WB-FRB 8x8	8" x 8"	1	6
WB-FRB 10x10	10" x 10"	1	9
WB-FRB 12x12	12" x 12"	1	11
WB-FRB 14x14	14" x 14"	1	14
WB-FRB 16x16	16" x 16"	1	17
WB-FRB 18x18	18" x 18"	1	21
WB-FRB 20x20	20" x 20"	1	24
WB-FRB 22x22	22" x 22"	1	28
WB-FRB 22x30	22" x 30"	2	29
WB-FRB 22x36	22" x 36"	2	30
WB-FRB 24x24	24" x 24"	1	26
WB-FRB 24x30	24" x 30"	2	43
WB-FRB 24x36	24" x 36"	2	38
WB-FRB 30x30	30" x 30"	2	50

Rough wall opening = door size + 1/4"




WB-FR B

### DIMENSIONS

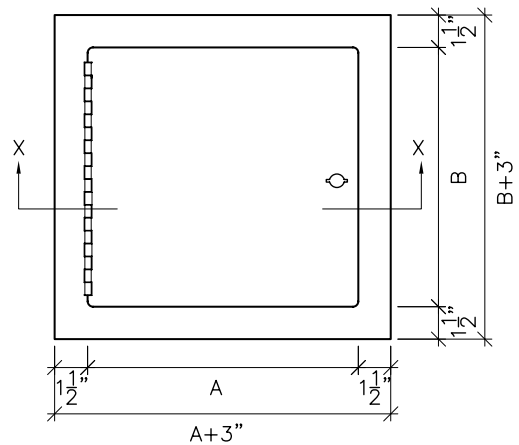

Elevation

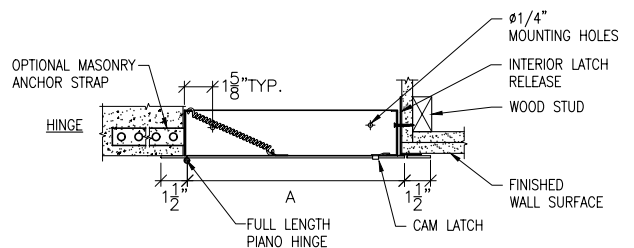

Section Detail