

ABS SURFACE FIRE EXTINGUISHER / HOSE / VALVE CABINETS

Ideal for use in outdoor environments. The WB-ABS cabinet has anti UV properties and a neoprene gasket for a water resistant seal. 2x latches with built in hasps for padlock (not incl.) if required. 2x Plexi windows ensures good visibility of equipment and overall door strength.



WB-ABS1



WB-ABS2




FEATURES

Construction Specifications


- 2.5mm ABS Construction
- Black Tub / Red Door
- Neoprene Gasket
- 2x Snap Closures
- 2x Clear Acrylic Viewing Panels

DIMENSIONS

cabinet window: 2pcs; sizes: 250mm x 130mm

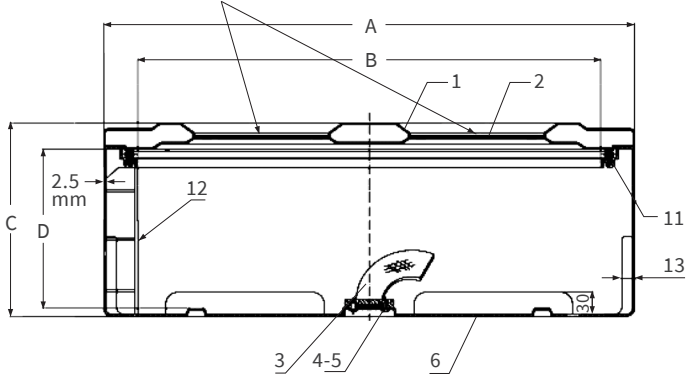

Side

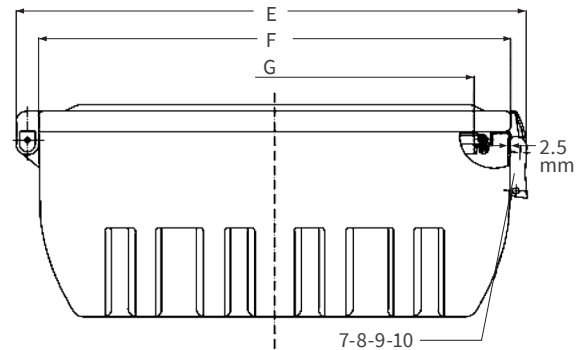

Top/Bottom

Parts

1	Door	3-5	Woven Nylon Restraining Strap & Tension Buckle	6	Tub	11	Neoprene Gasket Seal
2	Acrylic Viewing Panels			7-10	Buckle (x2)	12	Base Plate

	Capacity	Measurements						
		A	B	C	D	E	F	G
WB-ABS1	1x 20lb Dry Chemical Fire Extinguisher	32.68" 830mm	29.53" 750mm	10.24" 260mm	8.46" 215mm	12.60" 320mm	11.02" 280mm	7.87" 200mm
WB-ABS2	2x 20lb Dry Chemical Fire Extinguishers or 75ft 1 1/2" Rack Hose w/ 1 1/2" Angle Valve	27.95" 710mm	24.41" 620mm	10.63" 270mm	7.87" 200mm	22.83" 580mm	20.87" 530mm	16.93" 430mm