



## WB-WTD WALK THROUGH ACCESS DOOR


The WB-WTD Walk Through Access Door is an insulated walk through door. It provides easy access to interior duct work and air handling equipment. It is constructed with galvanized steel to ensure durability. It comes complete with neoprene gasketing, insulation, full length piano hinge and L-Handle locking latch that is operable from both sides.

### FEATURES

<b>Door</b>	22 ga. satin coat
<b>Trim</b>	16 ga. satin coat
<b>Return Frame</b>	16 ga. satin coat, 1 3/4" deep
<b>Hinge</b>	Full-length piano hinge
<b>Latch</b>	L-Handle operable from both sides Doors higher than 48" come with 3 handles
<b>Insulation</b>	1" thick AMVIC <i>SilveRboard Ridge Foam Insulation</i>
<b>Gasket</b>	Neoprene gasketing on all 4 sides of door
<b>Finish</b>	Powder coat aluminum finish
<b>Options</b> (at extra cost)	<ul style="list-style-type: none"> <li>• Stainless steel #304 and #316 (#4 satin finish)</li> <li>• Extra latches</li> <li>• Custom sizes available</li> </ul>

Model No.	A x B Door Size	Hinge	Latch	Shipping Weight (lbs)
WB-WTD 24x36	24" x 36"	1	2	32
WB-WTD 24x48	24" x 48"	1	2	42
WB-WTD 24x60	24" x 60"	1	3	52
WB-WTD 24x72	24" x 72"	1	3	62
WB-WTD 30x36	30" x 36"	1	2	39
WB-WTD 30x48	30" x 48"	1	3	52
WB-WTD 30x60	30" x 60"	1	3	65
WB-WTD 30x72	30" x 72"	1	3	78

Rough wall opening = door size + 1/4"

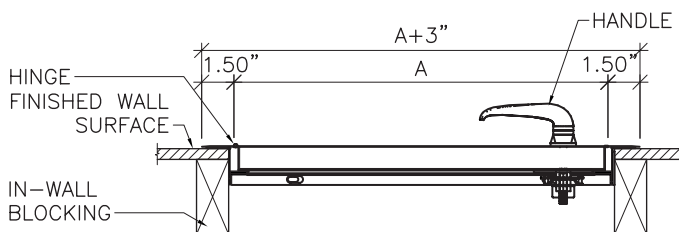


Section Detail



WB-WTD

### DIMENSIONS

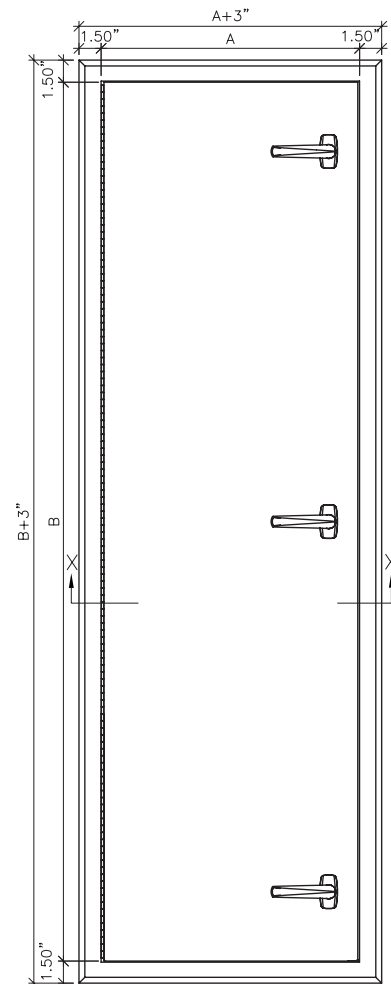

Elevation